

SEACON 26 PIN TI 1M PIGTAIL CABLE


PRODUCT DESCRIPTION

1 DESCRIPTION

SEACON 26 PIN TI 1M PIGTAIL cable for OCTANS NANO and ROVINS Nano products	
Part Number	SCA00248
Size	1 m
Depth rating	6000 m





Before plugging check the presence of the O-ring




2 CABLING DETAILS

FACE VIEW

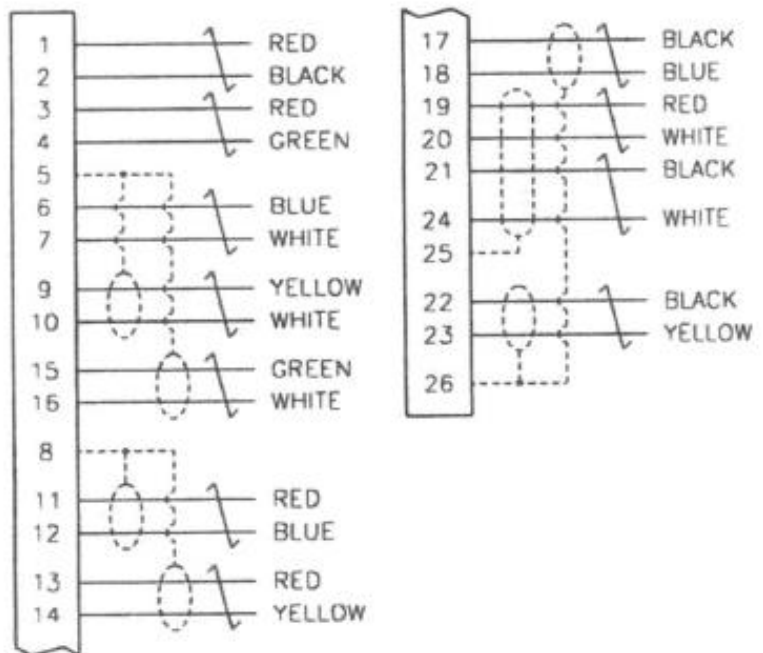

3 PINOUT DETAILS

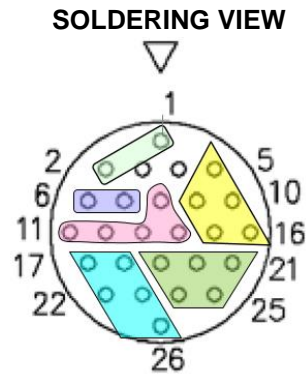

PIN	Signal
1	System Power In (+24 V)
2	System Power In GND (0/24 V) (*)
3	<i>OCTANS Nano : Reserved</i> ROVINS Nano : External Sensor 1 power line: (+V1)
4	<i>OCTANS Nano : Reserved</i> ROVINS Nano : External Sensor 1 power line: (GND_1)
5	Repeater : GND_R (*)
6	Pulse A: IN TTL
7	Pulse A: GND_A (*)
8	Port A: GND_A (*)
9	Repeater : RS422 TX(+)(B)/RS232 TX(+)
10	Repeater : RS422 TX(-)(A)
11	Port A: RS422 TX(+)(B)/RS232 TX(+)
12	Port A: RS422 TX(-)(A)
13	Port A: RS422 RX(-)(A)/RS232 RX(+)
14	Port A: RS422 RX(+)(B)
15	Repeater : RS422 RX(-)(A)/RS232 RX(+)
16	Repeater : RS422 RX(+)(B)
17	Port B: RS422 TX(+)(B)/RS232 TX(+)
18	Port B: RS422 TX(-)(A)
19	Ethernet TX(+)
20	Ethernet TX(-)
21	Ethernet RX(+)
22	Port B: RS422 RX(-)(A)/RS232 RX(+)
23	Port B: RS422 RX(+)(B)
24	Ethernet RX(-)
25	Shield Ethernet
26	Port B: GND_B (*)